

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
27 February 2003 (27.02.2003)

PCT

(10) International Publication Number  
**WO 03/015682 A1**

- (51) International Patent Classification<sup>7</sup>: **A61F 13/56**, 13/476, 13/62
- (21) International Application Number: PCT/US02/26804
- (22) International Filing Date: 20 August 2002 (20.08.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/313,604 20 August 2001 (20.08.2001) US  
10/037,277 20 December 2001 (20.12.2001) US
- (71) Applicant: **KIMBERLY-CLARK WORLDWIDE, INC.** [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventors: **HAMMONDS, Yvette, L.**; 3033 Rosewood Lane, Oshkosh, WI 54904 (US). **RASMUSSEN, Shelley, R.**; 3297 Creek Side Drive, Oshkosh, WI 54904 (US).
- (74) Agents: **SIDOR, Karl, V.** et al.; Kimberly-Clark Worldwide, INC., 401 N. Lake St., Neenah, WI 54956 (US).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM AND METHOD FOR ATTACHING ABSORBENT ARTICLES

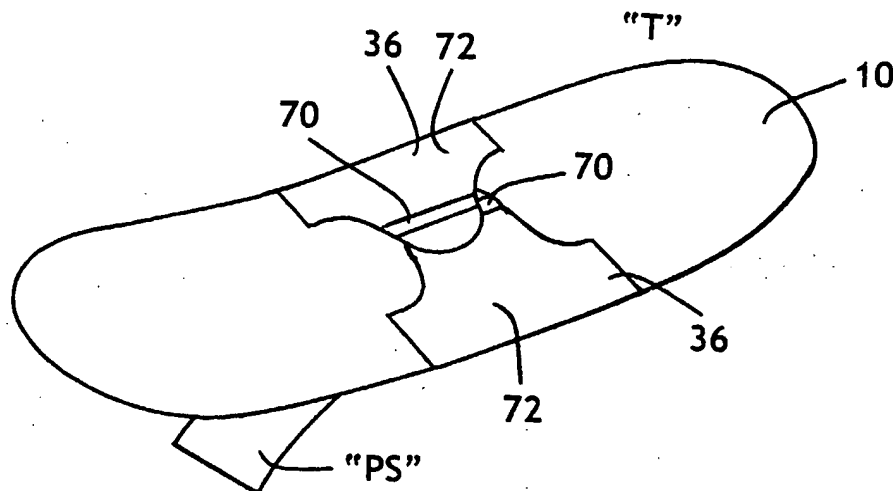

(57) Abstract: A system for attaching a personal care article to an undergarment, the system including: (a) providing a personal care article having a top surface, a bottom surface, garment attachment adhesive applied to the bottom surface, a peel strip covering the garment attachment adhesive and pair of wings including selectively releasable, interengaging fasteners such that the wings are adapted to be temporarily mechanically engaged on the topsheet side of the article and then reconfigured to hold the article to an undergarment; (b) overlapping and temporarily interengaging the wings on the top surface of the article while the peel strip protecting the garment adhesive is removed; (c) positioning the article in an undergarment and securing the article to the undergarment utilizing the garment adhesive; and (d) disengaging the wings and re-engaging the wings around the undergarment to further secure the article to the undergarment.

## **SYSTEM AND METHOD FOR ATTACHING ABSORBENT ARTICLES**

### **Field of the Invention**

The present invention relates to fastening systems for garments and other articles. More particularly, the present invention relates to interlocking, mechanical-type fastening systems which can be employed with disposable personal care articles, such as sanitary napkins, incontinence pads and the like.

5

### **Background**

Absorbent articles such as sanitary napkins, incontinence pads and the like may be secured to an undergarment to hold the article in proper position during use. These articles frequently employ wings or flaps as well as garment attachment adhesive on the garment facing side of the article to secure the article to the undergarment. The wings or flaps typically employ adhesive to secure the end of the wing or flap to the undergarment.

Users often encounter difficulty attaching or applying the absorbent article. The peel strips or release materials covering the adhesive on the wings as well as the garment attachment adhesive are typically removed by the user at the same time. If the flexible wings contacts the garment attachment adhesive, the wings can get "stuck". Alternatively, the adhesive on the flexible wings may contact a portion of the article causing the wing to stick. In other situations, the adhesive on the flexible wings might stick together or the adhesive on the flexible wings might come into contact with the garment attachment adhesive. Each of these situations presents difficulties for the wearer to overcome when applying the article.

20

### **Summary**

The present invention addresses the problems discussed above by providing a system and method for attaching absorbent articles such as, for example, a sanitary napkin or an incontinence product to an undergarment.

25

According to the method of the invention, the fastening system provides ease of use or application benefits. In particular, flaps or wings of an article may be temporarily mechanically interengaged on the topsheet side or body side of the sanitary napkin or incontinence article while the peel strip protecting the garment adhesive is removed. The article may then be placed in position on an undergarment and then the wings may be engaged in a conventional manner.

30

The fastening system may include: a pair of wings including selectively releasable, interengaging fasteners such that the wings are adapted to be temporarily mechanically engaged on the topsheet side of the article and then reconfigured to hold the article (e.g., sanitary napkin) to an undergarment. The fastening system further includes garment adhesive (covered by a peel strip) on the garment facing side of the article. In an embodiment of the invention, the fastening system may further include a fastener component including a plurality of engagement members configured so that it is adapted to engage the fabric of an undergarment.

Desirably, the fastening system includes:

(a) a first wing extending from a first longitudinal edge of the article (e.g., sanitary napkin) and a second wing extending from a second longitudinal edge of the article (e.g., sanitary napkin), each wing having a fixed end and a free end;

(b) a first fastener component that may form at least a portion of the first wing and the second wing, the first fastener component including an engagement section having a plurality engagement members; and

(c) a cooperating fastener component that may form at least a portion of the first wing and the second wing such that the first and second wings of the article (e.g., sanitary napkin) are capable of being temporarily mechanically interengaged on the topsheet side or body side of the article (e.g., sanitary napkin) while a peel strip protecting the garment adhesive is removed. The article may then be placed in position on an undergarment and then the wings may be engaged in a conventional manner.

An aspect of the present invention is directed to a sanitary napkin having a pair of end edges, a first longitudinal edge and a second longitudinal edge located between the end edges, a backsheet layer, a substantially liquid permeable topsheet layer and an absorbent disposed between the topsheet layer and the backsheet layer. The sanitary napkin further incorporates a fastening system that includes:

(a) a first wing extending from a first longitudinal edge of sanitary napkin and a second wing extending from a second longitudinal edge of the sanitary napkin, each wing having a fixed end and a free end;

(b) a first fastener component that may form at least a portion of the first wing and the second wing, the first fastener component including an engagement section having a plurality engagement members; and

(c) a cooperating fastener component that may form at least a portion of the first wing and the second wing such that the first and second wings of the sanitary napkin are capable of being temporarily mechanically interengaged on the topsheet side or body side of the sanitary napkin while a peel strip protecting the garment adhesive is removed. The

sanitary napkin may then be placed in position on an undergarment and then the wings may be engaged in a conventional manner.

5 The first fastener component may have a plurality of substantially non-isotropic engagement members such that the engagement section has an axis of substantially maximal engagement and the first fastener component is oriented so its axis of substantially maximal engagement is generally orthogonal to the attachment direction. Each substantially non-isotropic engagement member may have a stem portion with a distal end region and a securement element disposed at the distal end region of its corresponding stem portion.

10 The cooperating fastener component can be a loop material such as, for example, a woven, knit and/or nonwoven loop material. As a further example, the nonwoven loop material can be a pattern unbonded material. For example, the nonwoven loop material may be a pattern unbonded material such as, for example, the material described in U.S. Patent Nos. 5,858,515 and/or 5,763,041, the contents of which are incorporated herein by  
15 reference.

In as aspect of the invention, the fastening system can be used to secure the sanitary napkin or incontinence pad in a configuration convenient for disposal.

## 20 **Brief Description of the Drawings**

The present invention will be more fully understood and further advantages will become apparent when reference is made to the following detailed description of the invention and the drawings, in which:

Fig. 1A is an illustration of an exemplary article incorporating an exemplary  
25 fastening system of the invention;

Fig. 1B is an illustration of an exemplary article incorporating an exemplary fastening system of the invention;

Fig. 1C is an illustration of an exemplary article incorporating an exemplary fastening system of the invention as it is used with an undergarment;

30 Fig. 1D is an illustration of an exemplary article incorporating an exemplary fastening system of the invention – with the backsheet of the article facing upward ;

FIG. 1D' is an illustration of an exemplary article incorporating an exemplary fastening system of the invention – with the backsheet of the article facing upward;

FIG. 1E is an illustration of a portion of an exemplary article incorporating an exemplary fastening system of the invention – with the backsheet of the article facing upward;

5 Figs. 2A-B are photomicrographs of an exemplary , non-isotropic engagement member which can be employed with the present invention;

Figs. 3 and 4 are photomicrographs of exemplary cooperating fastener members (e.g., loop materials) that may be used with the present invention;

10 Figs. 5 A-C are illustrations of a sequence showing an exemplary method of the present invention when applying an article that employs the fastening system of the present invention.

### **Detailed Description of the Invention**

The various aspects and embodiments of the invention will be described in the context of a disposable absorbent article, such as a sanitary napkin or a disposable  
15 incontinence pad or the like. Typically, the disposable articles are intended for limited use and are not intended to be laundered or otherwise cleaned for reuse. A disposable sanitary napkin, for example, is discarded after it has become soiled by the wearer.

With reference to the Figures, an article, such as a sanitary napkin 10 illustrated in FIGS. 1A-E has a lengthwise, longitudinal direction 26, a lateral cross-direction 24, and a  
20 longitudinally extending medial line 40. The article includes a first article portion, a second article portion and at least one fastener 36 for securing the first article portion to the second article portion. Such securement can, for example, be configured to thereby hold the article on a wearer. The fastener desirably includes at least one, first fastener  
25 component 70 attached to an appointed section of the first (or second) article portion, and a cooperating fastener component 72 attached to the second (or first) article portion. The first fastener component 70 includes an engagement section having a first plurality of engagement members 56. Each engagement member 56 has a stem portion with a distal end region, and has at least one securement element disposed at its corresponding distal end region. The plurality of engagement members has an arrangement pattern of their  
30 securement elements. It is contemplated that multiple pluralities of engagement members, each with different arrangement pattern of their securement elements, may be used.

Another aspect of the invention can provide an article in which the fastener component may include an engagement section having a plurality of non-isotropic engagement members. Each non-isotropic engagement member can have a stem portion  
35 with a distal end portion, and a direction-dependent securement element which is non-

isotropically disposed at the distal end region of its corresponding stem portion to provide a non-isotropic engagement opening. The plurality of non-isotropic engagement members can have an alignment pattern of their engagement openings. It is contemplated that multiple pluralities of non-isotropic engagement members may be used and that  
5 different alignment patterns of their engagement openings are possible.

In particular configurations, a majority of the plurality of non-isotropic engagement members have their engagement openings directed substantially orthogonal to an attachment direction. Generally speaking, the attachment direction is the direction in which the respective first and second portions of the article are brought together into an  
10 overlapping and interengaging relationship. Thus, in FIGS. 1A-E the attachment direction is generally a direction having a cross-directional vector-component along the lateral direction 24 and toward the medial line 40 of the article. Accordingly, the plurality of non-isotropic engagement members would have their engagement openings directed substantially parallel with the medial line 40 of the article.

15 In the various aspects of the invention, the individual engagement members are typically flexible and resilient, but will substantially retain their initial shape during ordinary use. When flexed or deformed during ordinary use, the engagement members will substantially avoid plastically deforming to sustain the deformation, and will, instead, substantially return or "spring-back" to their original orientations and shape.

20 FIGS. 1A-1E are illustrations of an exemplary sanitary napkin with fasteners 36 in the form of wings or flaps. At least one first fastener component 70 is attached to the wing 36 and at least one cooperating fastener component 72 is attached to the opposite wing 36. In some embodiments of the invention, the first fastener component 70 and the cooperating fastener component 72 may be attached to each wing such that the wings  
25 may be fastened without concern for overlapping the wings in any particular order. In other yet embodiments, the wing may be formed partially or entirely of the cooperating fastener component 72. FIG. 1C is an illustration of the sanitary napkin with its wings 36 or flaps secured around an undergarment or panty "P". The arrows labeled "A" generally represent the attachment direction. The arrows labeled "O" generally represent the  
30 direction that is orthogonal to the attachment direction. It should be understood that this orthogonal direction is thought to be generally or substantially along or in the plane of the article although in some specific cases, it include a minor Z-direction component.

According to the invention, the first fastener component should be configured to have an axis of maximal engagement. This can be accomplished by utilizing a plurality of  
35 engagement members 56 that are non-isotropic (i.e., anisotropic) or non-symmetric. When the axis of maximal engagement of the first fastener component is oriented to be

generally orthogonal to the attachment direction (that is, the direction each fastener component is generally brought together to effect overlapping engagement), it has been unexpectedly found that the fastening system is adapted to become more interengaged as the product is worn. For example, peel force and shear force as determined utilizing standard test procedures prior to wearing the article is greater for fastening systems in which the axis of maximal engagement of the first fastener component is oriented in the attachment direction and lower for fastening systems in which the axis of maximal engagement of the first fastener component is oriented orthogonal to the attachment direction.

When the peel force and the shear force were measured after use, the values increased for both orientations. However, the peel force and sheer force values measured for fastening systems in which the axis of maximal engagement of the first fastener component is oriented orthogonal to the attachment direction were greater than those measured for fastening systems in which the axis of maximal engagement of the first fastener component is oriented in the attachment direction.

The following is a brief description of the orientation direction with respect to the lengthwise, longitudinal direction 26 and the lateral cross-wise direction depicted in FIGS. 1A, 1D and 1D'. In one exemplary sanitary napkin, the orienting the axis of maximal engagement of the first fastener component in the attachment direction meant orienting the first fastener component so its axis of maximal engagement was in the cross-machine direction or the lateral cross-direction 24 shown in FIGS. 1A, 1D and 1D'. Thus, for that sanitary napkin, the orienting the axis of maximal engagement of the first fastener component generally orthogonal to the attachment direction meant orienting the first fastener component so its axis of maximal engagement was in the machine direction or the lengthwise, longitudinal direction 26 shown in FIGS. 1A, 1D and 1D'.

In another aspect of the invention, the fastening system also provides ease of use or application benefits. As shown in FIGS. 5A-C, the wings or fasteners 36 may be engaged on the topsheet side "T" or body side of the sanitary napkin or incontinence article 10 while the peel strip "PS" protecting the garment adhesive (not shown) is removed. The article may then be placed in position on an undergarment "P" and then the wings may be engaged.

The present invention also encompasses a sanitary napkin or incontinence pad that has an attachment system having wings that are adapted to hold, secure, attach or join the sanitary napkin or incontinence pad to an undergarment as well as a fastener component including a plurality of engagement members that are adapted to engage the fabric of an undergarment to also help hold, secure, attach or join the sanitary napkin or



incontinence pad to the undergarment. In particular, FIG. 5A shows such a system in which the fasteners or wings 36 that may be formed of the cooperating fastener component 72 are engaged by contact with the first fastener component 70. A strip of garment adhesive (not shown) on the backsheet side or garment side of the article 10 can help secure the article to the underwear "P". In addition, a first fastener component 70' is in a position to engage the fabric of the underwear "P" while the fasteners or wings 36 secure or join the article to the underwear "P" by wrapping around the underwear.

With reference to the representative configurations shown in FIGS. 1 A - E, the article can include a system of flap regions, wings, "ear" regions or ear members. In particular arrangements, each flap, wing or ear region or member may extend laterally at the opposed, lateral ends of the article such as an incontinence pad or sanitary napkin.

In the various configurations of the invention, the ear, tab, flap or wing regions may be integrally formed with a selected article component. For example, ear, tab, flap or wing regions can be integrally formed from the layer of material which provides backsheet layer and/ or may be integrally formed from the material employed to provide topsheet. In alternative configurations, the ear, tab, flap or wing regions may be provided by one or more separately provided members that are connected and assembled to the backsheet, to the topsheet, in between the backsheet and topsheet, or in various fixedly attached combinations of such assemblies.

In particular configurations of the invention, each of the ear, tab, flap or wing regions may be formed from a separately provided piece of material which is then suitably assembled and attached to a selected portion of the article.

The ear, tab, flap or wing regions may be composed of a substantially non-elastomeric material, such as polymer films, woven fabrics, nonwoven fabrics or the like, as well as combinations thereof. In particular aspects of the invention, ear, tab, flap or wing regions may be composed of a substantially elastomeric material, such as a stretch-bonded-laminate (SBL) material, a neck-bonded-laminate (NBL) material, an elastomeric film, an elastomeric foam material, or the like, which is elastomerically stretchable at least along the lateral direction 24. For example, suitable meltblown elastomeric fibrous webs for forming ear, tab, flap or wing regions are described in U.S.P. 4,663,220 issued May 5, 1987 to T. Wisneski et al., the entire disclosure of which is hereby incorporated by reference. Examples of composite fabrics comprising at least one layer of nonwoven textile fabric secured to a fibrous elastic layer are described in European Patent Application EP 0 217 032 A2 published on April 8, 1987 which has the listed inventors of J. Taylor et al., the entire disclosure of which is hereby incorporated by reference. Examples of NBL materials are described in U.S. Patent No. 5,226,992 issued July 13,

1993 to Mormon, the entire disclosure of which is hereby incorporated by reference in a manner that is consistent herewith.

As previously mentioned, various suitable constructions can be employed to attach the ear, tab, flap or wing regions to the selected portions of the article. Particular  
5 examples of suitable constructions for securing a pair of elastically stretchable members to the lateral, side portions of an article to extend laterally outward beyond the laterally opposed side regions of the outer cover and liner components of an article can be found in U.S. Patent No. 4,938,753 issued July 3, 1990 to P. VanGompel et al., the entire disclosure of which is hereby incorporated by reference in a manner that is consistent  
10 herewith.

The illustrated ear, tab, flap or wing regions have a tapered, curved or otherwise contoured shape in which the longitudinal length of the relatively inboard base region is larger or smaller than the longitudinal length of its relatively outboard end region. Alternatively, the ear regions may have a substantially rectangular shape, and optionally  
15 may have a substantially trapezoidal shape.

In the various aspects and configurations of the invention, the fastening mechanism between the selected first fastener component and the selected, cooperating fastener component may be adhesive, cohesive, mechanical or combinations thereof. In the context of the present invention, a mechanical fastening system is a system which  
20 includes a first fastener component and cooperating fastener component which mechanically inter-engage to provide a desired securement.

Desirably, the first fastener component and cooperating fastener components include complementary elements of a cooperatively interengaging mechanical fastening system. The mechanical fastener components can be provided by mechanical-type  
25 fasteners such as hooks, buckles, snaps, buttons and the like, which include cooperating and complementary, mechanically interlocking components.

As shown in the illustrated arrangements, for example, the mechanical fastening system may be a hook-and-loop type of fastening system. Such fastening systems typically include engagement members having the form of a "hook" or hook-like, male  
30 component, and include a cooperating "loop" or loop-like, female component which engages and releasably interconnects with the hook component. Desirably, the interconnection is selectively releasable and re-attachable. Conventional systems are, for example, available under the VELCRO trademark. The hook element may be provided by a single-prong hook configuration, a multiple-prong hook configuration or by a generally  
35 continuous, expanded-head configuration, such as provided by a mushroom-head type of hook element. The loop element may be provided by a woven fabric, a nonwoven fabric,

a knitted fabric, a perforated or apertured layer, and the like, as well as combinations thereof. The many arrangements and variations of such fastener systems have been collectively referred to as hook-and-loop fasteners.

A configuration which employs a selectively releasable, interengaging mechanical fastening system can, for example, locate the first fastener component on at least the appointed mating or securing surface of the tab, flap or wing 36, and can locate the cooperating fastener component on the appointed engagement surface of the appointed tab, flap or wing 36. For example, with the representatively shown hook-and-loop fastener, the fastening component which is attached to the appointed mating or securing surface of a fastener tab 36 may include a hook type of mechanical engagement element, and the complementary fastening component, which is operably joined and attached to the appointed surface of a fastener tab 36 can include a loop type of fastening element.

It should also be readily apparent that, in the various configurations of the invention, the relative positions and/or materials of the first fastening component and its cooperating, complementary fastening component can be transposed.

Examples of hook-and-loop fastening systems and components are described in U.S.P. 5,019,073 issued May 28, 1991 to T. Roessler et al., the entire disclosure of which is hereby incorporated by reference in a manner that is consistent herewith. Other examples of hook-and-loop fastening systems are described in U.S. Patent Application Serial No. 366,080 entitled HIGH-PEEL TAB FASTENER, filed December 28, 1994 by G. Zehner et al. (attorney docket No. 11,571) which corresponds to U.S. Patent No. 5,605,735; and U.S. Patent Application Serial No. 421,640 entitled MULTI-ATTACHMENT FASTENING SYSTEM, filed April 13, 1995 by P. VanGompel et al.; the entire disclosures of which are hereby incorporated by reference in a manner that is consistent herewith. Examples of fastening tabs constructed with a carrier layer are described in U.S. Patent Application Serial No. 08/603,477 of A. Long et al., entitled MECHANICAL FASTENING SYSTEM WITH GRIP TAB and filed March 6, 1996 (attorney docket No. 12,563) which corresponds to U.S. Patent No. 5,624,429 which issued April 29, 1997, the entire disclosure of which is hereby incorporated by reference in a manner which is consistent herewith.

An example of a suitable micro-hook material is distributed under the designations VELCRO HTH 829 and VELCRO HTH 851 and is available from VELCRO U.S.A., Inc., a business having offices in Manchester, New Hampshire. The micro-hook material can have hooks in the shape of angled hook elements, and can be configured with a hook density of about 264 hooks per square centimeter (about 1700 hooks per square inch); a hook height which is within the range of about 0.030 - 0.063 cm (about 0.012 - 0.025

inch); and a hook width which is within the range of about 0.007 to 0.022 cm (about 0.003 to 0.009 inch). The hook elements are molded onto a base layer substrate having a thickness of about 0.0076 - 0.008 cm (about 0.003 - 0.0035 inch), and the member of hook material has a Gurley stiffness of about 12 mgf (about 12 Gurley units). Other  
5 suitable hook materials can include VELCRO HTH 858, VELCRO HTH 851 and VELCRO HTH 863 hook materials.

For the purposes of the present invention, the various stiffness values are determined with respect to a bending moment produced by a force which is directed perpendicular to the plane substantially defined by the length and width of the component  
10 being tested. A suitable technique for determining the stiffness values described herein is a Gurley Stiffness test, a description of which is set forth in TAPPI Standard Test T 543 om-94 (Bending Resistance of Paper (Gurley type tester)). A suitable testing apparatus is a Gurley Digital Stiffness Tester; Model 4171-D manufactured by Teledyne Gurley, a business having offices in Troy, New York. For purposes of the present description, the  
15 stated Gurley stiffness values are intended to correspond to the values that would be generated by a "standard" sized sample. Accordingly, the scale readings from the Gurley stiffness tester are appropriately converted to the stiffness of a standard size sample, and are traditionally reported in terms of milligrams of force (mgf). Currently, a standard "Gurley unit" is equal to a stiffness value of 1 mgf, and may equivalently be employed to  
20 report the Gurley stiffness.

In the various aspects and configurations of the invention, the loop material can be provided by a nonwoven, woven or knit fabric. For example, a suitable loop material fabric can be composed of a 2 bar, warp knit fabric of the type available from Guilford Mills, Inc., Greensboro, North Carolina under the trade designation #34285, as well as  
25 other types of knit fabrics. Suitable loop materials are also available from the 3M Company, which has distributed a nylon woven loop under their SCOTCHMATE brand. The 3M Company has also distributed a linerless loop web with adhesive on the backside of the web, and 3M knitted loop tape.

The loop material may also include a nonwoven fabric having continuous bonded areas defining a plurality of discrete unbonded areas. The fibers or filaments within the  
30 discrete unbonded areas of the fabric are dimensionally stabilized by the continuous bonded areas that encircle or surround each unbonded area, such that no support or backing layer of film or adhesive is required. The unbonded areas are specifically designed to afford spaces between fibers or filaments within the unbonded area that  
35 remain sufficiently open or large to receive and engage hook elements of the complementary hook material. In particular, a pattern-unbonded nonwoven fabric or web

may include a spunbond nonwoven web formed of single component or multi-component melt-spun filaments. At least one surface of the nonwoven fabric can include a plurality of discrete, unbonded areas surrounded or encircled by continuous bonded areas. The continuous bonded areas dimensionally stabilize the fibers or filaments forming the nonwoven web by bonding or fusing together the portions of the fibers or filaments that extend outside of the unbonded areas into the bonded areas, while leaving the fibers or filaments within the unbonded areas substantially free of bonding or fusing. The degree of bonding or fusing within the bonding areas desirably is sufficient to render the nonwoven web non-fibrous within the bonded areas, leaving the fibers or filaments within the unbonded areas to act as "loops" for receiving and engaging hook elements. Examples of suitable point-unbonded fabrics are described in U.S. Patent Application Ser. No. 754,419 entitled PATTERN-UNBONDED NONWOVEN WEB AND PROCESS FOR MAKING THE SAME, by T. J. Stokes et al., and filed December 17, 1996 (attorney docket No. 12,232); the entire disclosure of which is incorporated herein by reference in a manner that is consistent herewith.

In the various configurations of the invention, the loop material need not be limited to a discrete or isolated patch on the outward surface of the article. Instead, the loop material can be provided by a substantially continuous, outer fibrous layer which is assembled, integrated or otherwise joined to extend over a predetermined surface area of the desired article. For example, the outer fibrous layer may be arranged to extend over substantially the total exposed surface area of a cloth-like outer cover employed with the article.

In the various configurations of the invention, the engagement force between the selected first fastener component and its appointed and cooperating fastener component should be large enough and durable enough to provide an adequate securement of the article on the wearer during use. In particular arrangements, especially where there are sufficiently high levels of engagement shear force provided by the fastening system, the fastening engagement may provide a peel force value of not less than a minimum of about 40 grams-force (gmf) per inch of the "width" of engagement between the first and cooperating fastener components. In further arrangements, the fastening engagement may provide a peel force value of not less than about 100 gmf/inch to provide improved advantages. In desired configurations, the fastening engagement may provide a peel force value of not less than about 200 gmf per inch of the "width" of engagement between the first and cooperating fastener components. Alternatively, the peel force is not less than about 300 gmf/inch, and optionally is not less than about 400 gmf/inch to further provide improved benefits. In other aspects, the peel force is not more than about 1,200

gmf/inch. Alternatively, the peel force is not more than about 800 gmf/inch, and optionally is not more than about 600 gmf/inch to provide improved performance.

The engagement force between the selected first fastener component and its appointed and cooperating fastener component may additionally provide a shear force value of not less than about 400 gmf per square inch of the area of engagement between the first and cooperating fastener components. Alternatively, the shear force is not less than about 1,000 gmf/in<sup>2</sup>, and optionally, is not less than about 1,700 gmf/in<sup>2</sup>. In further aspects, the shear force can be up to about 4,400 gmf/in<sup>2</sup>, or more. Alternatively, the shear force is not more than about 3,900 gmf/in<sup>2</sup>, and optionally is not more than about 3,500 gmf/in<sup>2</sup> to provide improved performance.

The peel force value can be determined in accordance with standard procedure ASTM D-5170, approved Sept. 15, 1991 and published Nov. 1991; with the following particulars. The test specimen is the fastener tab from the article being assessed. The test specimen length is the dimension aligned along the direction in which a peel-away force is typically applied to disengage and remove the fastener during the ordinary use of the article with which the fastener is employed. The specimen "width" lies within the general plane of the fastener and is perpendicular to the specimen length. The roller device weighs 4.5 pounds and includes a rubber coating around the roller circumference. A suitable roller is part number HR-100 available from Chemsultants International, a business having a location in Mentor, Ohio. During the engagement of the fastener components, the roller is rolled over the test specimen through one cycle in the direction of the cross-wise "width" of the sample. In addition, the initial peel by hand to "raise the loops" is omitted. During testing, the fastener material held by the stationary clamp can be larger in area, as compared to the fastener material held in the moving clamp. The initial separation distance between the clamps of the tensile tester is 4 inch, and the extension speed of the tensile testing machine is 20 inch/min. The reported value of a peel test result is a "three-peak average" value employing MTS TESTWORKS software with a peak criteria of 2%. Additionally, the peel force value is normalized to be stated in terms of force per unit length of the "width" dimension of the fastener component on the test specimen, such as grams per inch. The MTS TESTWORKS software is available from MTS Systems Corporation, a business having offices in Eden Prairie, MN.

The shear force value can be determined in accordance with the standard procedure ASTM D-5169, approved September 15, 1991 and published Nov. 1991 with the following particulars. The test specimen is composed of the fastener tab from the article being assessed. The test specimen length and width typically correspond to the length and width employed to conduct the testing for peel force value. Ordinarily, the test

specimen length is the dimension aligned along the direction in which a shear force is typically applied to the fastener during the ordinary use of the article with which the fastener is employed. The specimen "width" lies within the general plane of the fastener and is perpendicular to the specimen length. The roller device weighs 4.5 pounds and includes a rubber coating around the roller. A suitable roller is part number HR-100 available from Chemsultants International, a business having a location in Mentor, Ohio. During the engagement of the fastener components, the roller is rolled over the test specimen through five cycles in the direction of the cross-wise "width" of the sample. In addition, the initial peel by hand to "raise the loops" is omitted. During testing, the fastener material (e.g. the loop material) held by the stationary clamp can be larger in area, as compared to the fastener material (e.g. hook material) held in the moving clamp. The initial separation distance between the clamps of the tensile tester is 4 inch, and the extension speed of the tensile testing machine is 10 inch/min. The shear force value is normalized to be stated in terms of force per unit area of the test specimen, such as grams per inch<sup>2</sup>.

The particulars of the standard test procedures are intended to generate fastening conditions that can be more representative of consumer use conditions. When preparing the test specimen materials (e.g. hook and loop materials) to determine the cooperating peel and/or shear force values for the representatively shown configurations of the invention, it should be noted that, the width dimension of the selected specimen material will correspond to the dimension of the fastener material which, in the actual article, is found to be aligned along the longitudinal direction 26 of the article. Similarly, the length dimension of the selected specimen material will correspond to the dimension of the fastener material which, in the actual article, is found to be aligned along the lateral direction 24 of the article.

Desirably, the securing engagement between the first fastener component and the cooperating fastener components should be sufficient to prevent a disengagement of the components when subject to a tensile force of at least about 1,000 grams when the tensile force is applied outwardly along the lateral direction, aligned generally parallel with the plane of the backsheet layer of the article.

Each of the fastener components and fastening elements in the various constructions of the invention may be operably attached to its supporting substrate by employing any one or more of the attachment mechanisms employed to construct and hold together the various other components of the article of the invention. The fastening elements in the various fastening regions, may be integrally formed, such as by molding, co-extrusion or the like, along with their associated substrate layer. The substrate layer

and its associated mechanical fastening elements may be formed from substantially the same polymer material, and there need not be a discrete step of attaching the fastening elements to an initially separate substrate layer. For example, the individual hook elements may be integrally formed simultaneously with a hook base-layer by coextruding  
5 the base layer and hook elements from substantially the same polymer material.

It should be readily appreciated that the strength of the attachment or other interconnection between the substrate layer and the attached fastening component should be greater than the peak force required to remove the fastener tab 36 from its releasable securement to the appointed landing member of the article.

10 Having described the invention in rather full detail, it will be readily apparent that various changes and modifications can be made without departing from the spirit of the invention



We claim:

1. A system for attaching a personal care article to an undergarment, the system comprising:

5 providing a personal care article having a top surface, a bottom surface, garment attachment adhesive applied to the bottom surface, a peel strip covering the garment attachment adhesive and pair of wings including selectively releasable, interengaging fasteners such that the wings are adapted to be temporarily mechanically engaged on the topsheet side of the article and then reconfigured to hold the article to an undergarment; overlapping and temporarily interengaging the wings on the top surface of the  
10 article while the peel strip protecting the garment adhesive is removed positioning the article in an undergarment and securing the article to the undergarment utilizing the garment adhesive; and disengaging the wings and re-engaging the wings around the undergarment to further secure the article to the undergarment.

15 2. The system of claim 1, wherein the system further includes a fastener component including a plurality of engagement members configured so that it is adapted to engage the fabric of an undergarment.

3. The system of claim 1, wherein the interengaging fasteners comprise:  
a first fastener component including an engagement section having a  
20 plurality engagement members; and  
a cooperating fastener component.

4. The system of claim 3, wherein the first fastener component is a mechanical hook material.

5. The system of claim 3, wherein the cooperating fastener component is a  
25 nonwoven loop material.

6. The system of claim 5, wherein the nonwoven loop material is a pattern unbonded material.

7. The system of claim 1, wherein the system can be used to secure the article in a configuration convenient for disposal.

30 8. An sanitary napkin having a pair of end edges, a first longitudinal edge and a second longitudinal edge located between the end edges, a backsheet layer, a substantially liquid permeable topsheet layer, an absorbent disposed between the topsheet layer and the backsheet layer, garment attachment adhesive applied to the backsheet layer, and a peel strip covering the garment attachment adhesive, the sanitary  
35 napkin further including a fastening system comprising:

a first wing extending from a first longitudinal edge of sanitary napkin and a second wing extending from a second longitudinal edge of the sanitary napkin, each wing having a fixed end and a free end;

5 a first fastener component forming at least a portion of the first wing and the second wing, the first fastener component including an engagement section having a plurality engagement members; and

a cooperating fastener component forming at least a portion of the first wing and the second wing,

10 so that the first and second wings of the sanitary napkin are (a) adapted to be temporarily mechanically interengaged on the topsheet side of the sanitary napkin during positioning of the sanitary napkin is an undergarment while a peel strip protecting the garment attachment adhesive is removed and the sanitary napkin is attached to an undergarment utilizing the garment attachment adhesive; and (b) then adapted to be disengaged from the topsheet side and interengaged around an undergarment to secure  
15 the sanitary napkin.

9. The sanitary napkin of claim 8, wherein the napkin further includes a fastener component including a plurality of engagement members configured so that it is adapted to engage the fabric of an undergarment.

10. The sanitary napkin of claim 8, wherein the interengaging fasteners comprise:  
20 a first fastener component including an engagement section having a plurality engagement members; and  
a cooperating fastener component.

11. The sanitary napkin of claim 10, wherein the first fastener component is a mechanical hook material.

25 12. The sanitary napkin of claim 10, wherein the cooperating fastener component is a nonwoven loop material.

13. The sanitary napkin of claim 12, wherein the nonwoven loop material is a pattern unbonded material.

30 14. The sanitary napkin of claim 8, wherein the fastening system can be used to secure the article in a configuration convenient for disposal.

15. A method of securing to an undergarment a personal care article having a top surface, a bottom surface, garment attachment adhesive applied to the bottom surface, a peel strip covering the garment attachment adhesive and pair of wings including selectively releasable, interengaging fasteners, the method comprising:

35 overlapping and temporarily interengaging the wings on the top surface of the article while the peel strip protecting the garment attachment adhesive is removed

positioning the article in an undergarment and securing the article to the undergarment utilizing the garment attachment adhesive; and

disengaging the wings on the top surface and re-engaging the wings around the undergarment to further secure the article to the undergarment.

5        16. The method of claim 15, further comprising the step of engaging a plurality of engagement members positioned on a wing adjacent the fabric of an undergarment with the fabric.

10       17. The method of claim 15, further comprising the step of engaging a first fastener component on at least one wing is engaged with a cooperating fastener component on at least one wing.

18. The method of claim 15, further comprising the step of interengaging a mechanical hook material with a loop material.

15       19. The method of claim 15, further comprising the step of utilizing selectively releasable interengaging fasteners to secure the article in a configuration convenient for disposal.

1/8

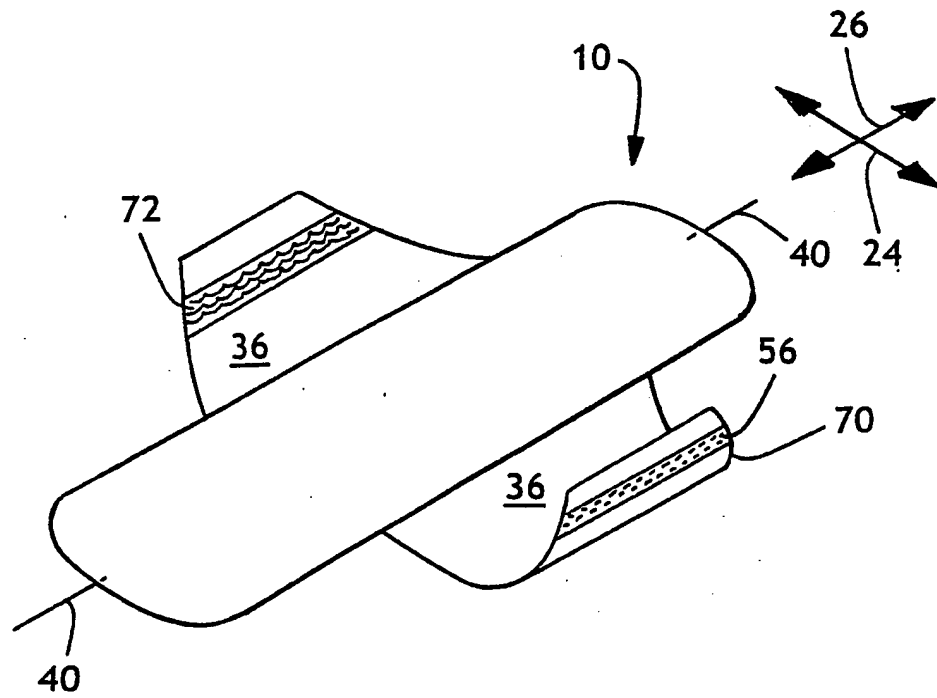


FIG. 1A

2/8

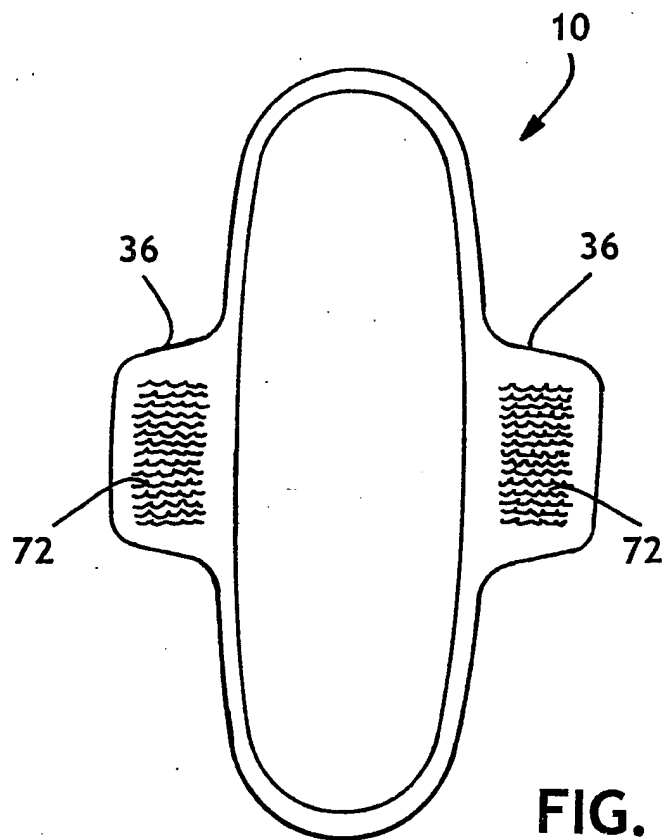


FIG. 1B

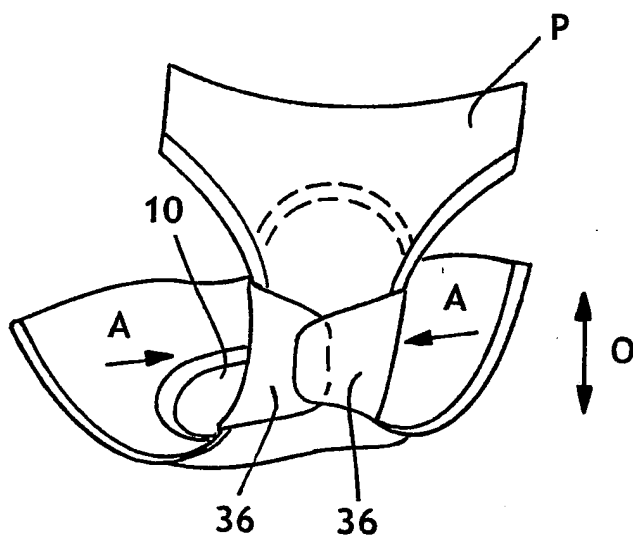


FIG. 1C

3/8

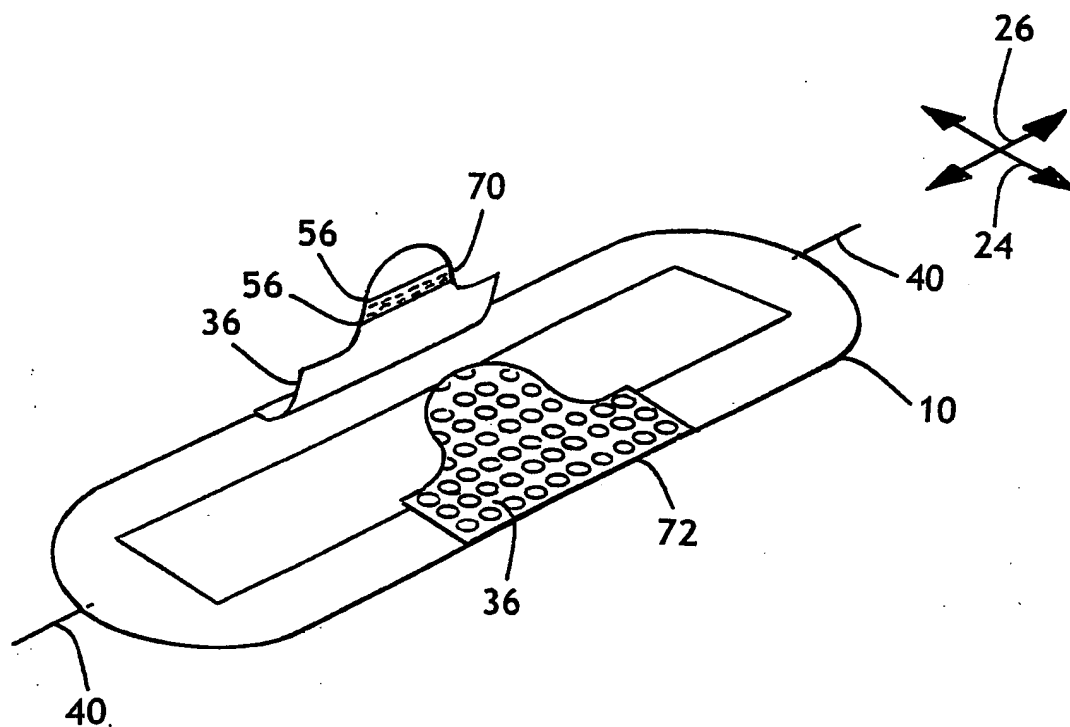


FIG. 1D

4/8

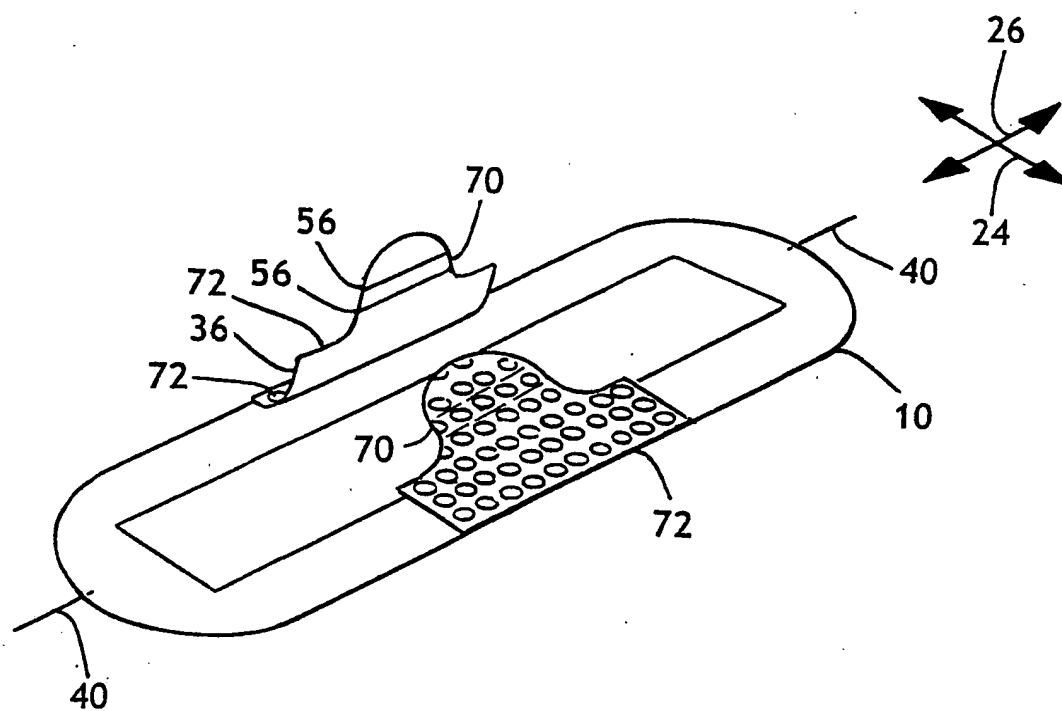


FIG. 1D'

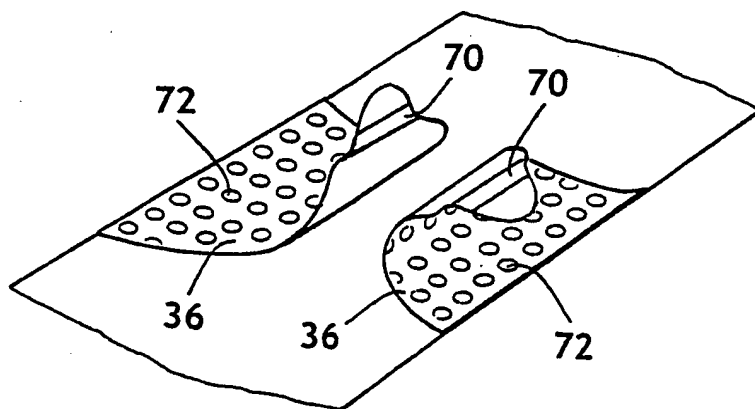


FIG. 1E

5/8

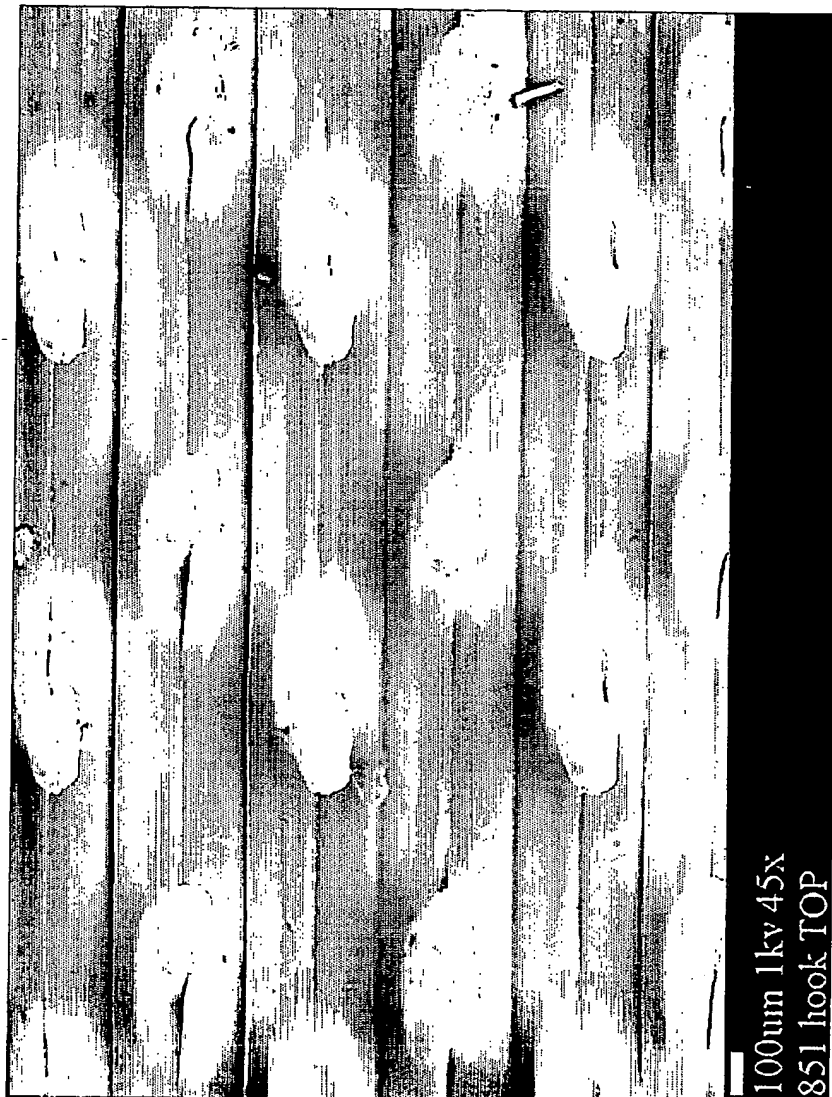


FIG. 2A




6/8



FIG. 2B

7/8

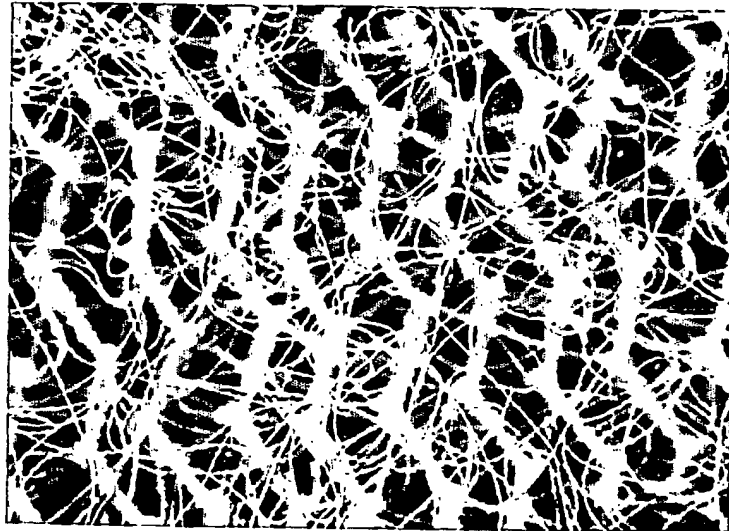

**Guilford Woven Loop**




**FIG. 3**



**Nonwoven PUB Loop Dots**

**FIG. 4**

8/8

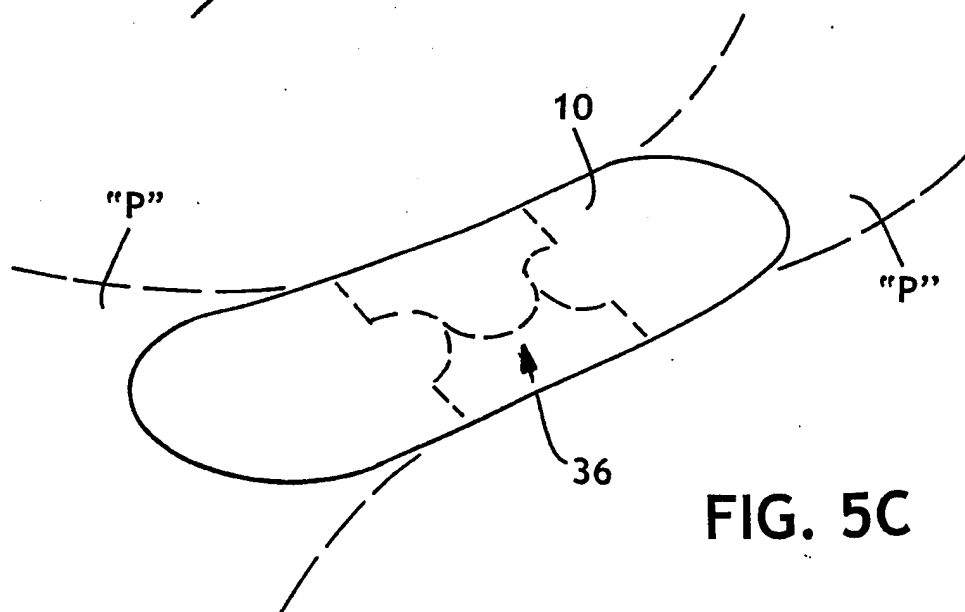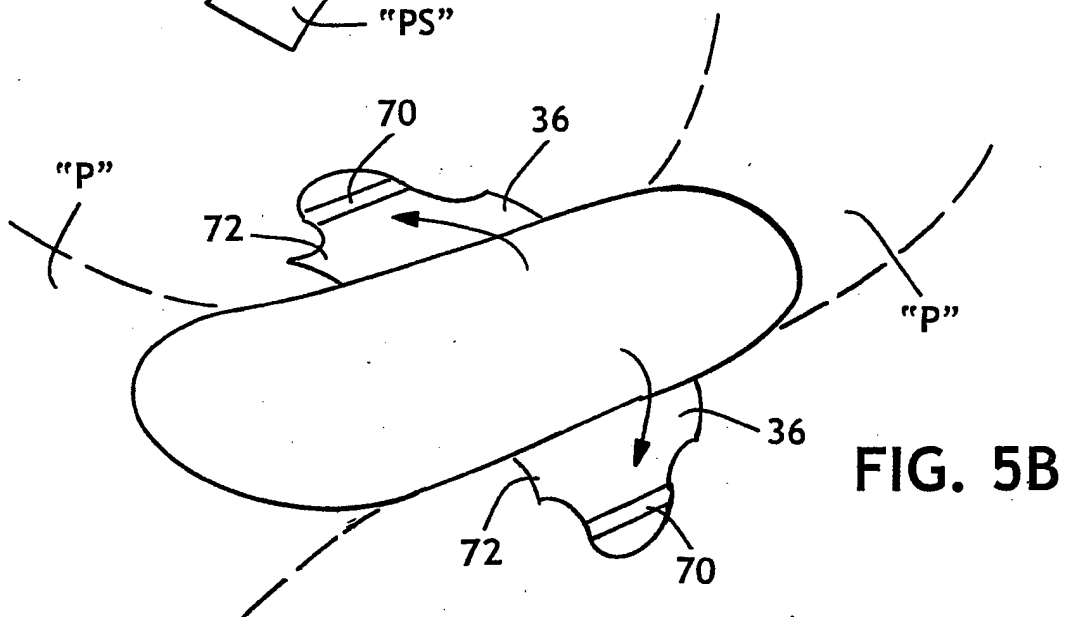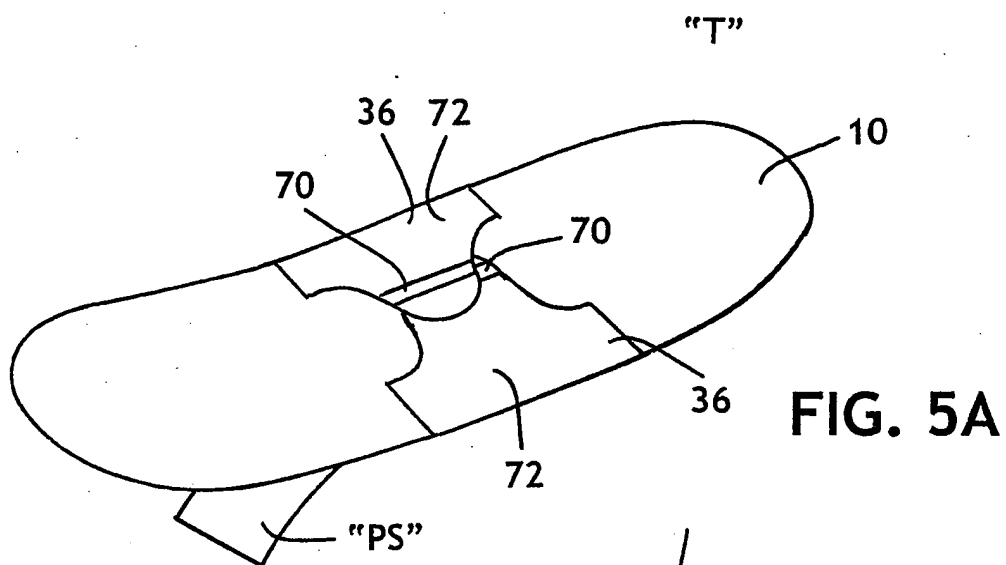

## INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/US 02/26804

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61F13/56 A61F13/476 A61F13/62

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 55268 A (HASEGAWA MAKI ;NISHIDA NAOFUMI (JP); PROCTER & GAMBLE (US)) 4 November 1999 (1999-11-04) page 12, line 33 -page 13, line 26 page 20, line 12-19; figures	1-6, 15-18
A	EP 0 595 047 A (KIMBERLY CLARK CO) 4 May 1994 (1994-05-04) page 5, line 1-5 page 7, line 37-42; figures	1,8,15
A	US 4 608 047 A (MATTINGLY WILLIAM B) 26 August 1986 (1986-08-26) column 2, line 22-38 column 3, line 26-31 column 6, line 20 -column 7, line 5; figures	1-19
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&amp;\* document member of the same patent family

Date of the actual completion of the international search

27 November 2002

Date of mailing of the international search report

05/12/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Seabra, L

## INTERNATIONAL SEARCH REPORT

Internat. Application No

PCT/US 02/26804

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 077 255 A (LAVASH BRUCE WILLIAM ET AL) 20 June 2000 (2000-06-20) column 11, line 21 -column 14, line 48; figures	1,2,8,9, 15,16
P,X	WO 01 72254 A (PROCTER & GAMBLE) 4 October 2001 (2001-10-04)  abstract page 25, line 8 -page 26, line 2 page 27, line 27 -page 28, line 15; figures 1-12	1,3-8, 10-15, 17-19
X	EP 0 764 433 A (PROCTER & GAMBLE) 26 March 1997 (1997-03-26)  abstract column 10, line 18-51 column 12, line 38-48; figures	1-6, 8-13, 15-18
A	US 5 858 515 A (CLARK DARRYL FRANKLIN ET AL) 12 January 1999 (1999-01-12) cited in the application abstract; figures 1,2	6,13

## INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat Application No

PCT/US 02/26804

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9955268	A	04-11-1999	WO 9955268 A1	04-11-1999
			AU 7262698 A	16-11-1999
			JP 2000513989 T	24-10-2000
EP 0595047	A	04-05-1994	AT 152342 T	15-05-1997
			AU 667117 B2	07-03-1996
			AU 4490293 A	14-04-1994
			BR 9303669 A	05-04-1994
			CA 2082669 A1	31-03-1994
			CN 1088079 A	22-06-1994
			CZ 9301959 A3	18-05-1994
			DE 9321615 U1	21-12-2000
			DE 69310312 D1	05-06-1997
			DE 69310312 T2	25-09-1997
			DK 595047 T3	01-12-1997
			EP 0595047 A1	04-05-1994
			ES 2100415 T3	16-06-1997
			GR 3024256 T3	31-10-1997
			HK 1006272 A1	19-02-1999
			JP 6125938 A	10-05-1994
			KR 240236 B1	15-01-2000
			MX 9206146 A1	31-03-1994
			PL 300536 A1	05-04-1994
			RU 2124876 C1	20-01-1999
			SK 102693 A3	11-05-1994
			US 2002068917 A1	06-06-2002
			US 6387084 B1	14-05-2002
			ZA 9305883 A	11-03-1994
US 4608047	A	26-08-1986	NONE	
US 6077255	A	20-06-2000	US 5676652 A	14-10-1997
			AT 210949 T	15-01-2002
			AU 6290696 A	18-02-1997
			CA 2226576 A1	06-02-1997
			DE 69618203 D1	31-01-2002
			DE 69618203 T2	14-08-2002
			EP 0840586 A1	13-05-1998
			ES 2164897 T3	01-03-2002
			JP 11509127 T	17-08-1999
			KR 253831 B1	15-04-2000
			WO 9703630 A1	06-02-1997
			ZA 9605789 A	27-01-1997
WO 0172254	A	04-10-2001	AU 5299501 A	08-10-2001
			WO 0172254 A2	04-10-2001
EP 0764433	A	26-03-1997	EP 0764433 A1	26-03-1997
			AU 7105096 A	09-04-1997
			CA 2232291 A1	27-03-1997
			EG 20692 A	30-11-1999
			JP 11504838 T	11-05-1999
			WO 9710787 A1	27-03-1997
			ZA 9607839 A	22-05-1997
US 5858515	A	12-01-1999	AU 700999 B2	14-01-1999
			AU 1348497 A	28-07-1997
			BR 9612354 A	13-07-1999

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat. Application No

PCT/US 02/26804

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5858515	A	CA 2239164 A1	10-07-1997
		CN 1209177 A	24-02-1999
		EP 0870081 A1	14-10-1998
		PL 327332 A1	07-12-1998
		TR 9801181 T2	21-02-2000
		WO 9724482 A1	10-07-1997
		RU 2149933 C1	27-05-2000
		ZA 9610867 A	27-06-1997

---